



TC-P12C6AS (V1.0R)

SETUP INFO

UPC #	710931401592
Master Carton UPC #	10710931401599
Product Page	http://www.trendnet.com/langen/products/product-detail.asp?prod=155_TC-P12C6AS
Additional Images	http://www.trendnet.com/langen/support/support-detail.asp?prod=155_TC-P12C6AS
Alternate Product Name	12-Port Cat6A Shielded Wall Mount Patch Panel, 1000BASE-T / 10GBASE-T Support, Wall mounting options, compatible with cat5e, cat6, cat6a, 110 or Krone type
Key Search Words	Cat5e, Cat6, Cat6A, Shielded patch panel, 12-port, half-U, STP, ANSI/EIA, EN50173-1, 110 blade, krone blade, tc-pdt, punch-down tool, 90° angle type, TIA-568A, TIA-568B, 0.5U IDC, patch panel, 10" patch panel, wall mount patch panel
Package Dimensions	25.0 x 12.6 x 3.5 cm (10 x 5 x 2 in.)
Package Weight	0.72kg (1.65 lbs)
Unit Qty per Case	10
Case Dimension	27 x 27 x 20 cm (23 x 11 x 8 in.)
Case Weight	6.53kg (15 lbs.)
Harmonized Tarriff Code	8536698000
ECCN	5A991
Country of Origin	China
Product Availability Date	April 2019
Warranty	3 year



12-Port Cat6A Shielded Wall Mount Patch Panel

TC-P12C6AS (v1.0R)


- 10G-Ready 12-port patch panel
- Cat6A patch panels deliver a steady connection to copper gigabit & 10G switches
- Shielded design to eliminate EMI and crosstalk
- Compatible with Cat5e, Cat6 and Cat6A cabling
- Wall mountable metal housing
- Color-coded labeling for T568A and T568B wiring schemes
- 110 IDC type terminal blocks (use 110 or Krone type tool)
- Use with TRENDnet TC-PDT Punch Down Tool (sold separately)
- Supports ANSI/EIA/TIA 568-B.2-1, ISO/IEC 11801, and EN50173-1
- 90° angle type
- Operating temperature: -25° – 50° C (-13° – 122° F)
- 3 year warranty

TRENDnet's 12-Port Cat6A Shielded Wall Mount Patch Panel, model TC-P12C6AS, is ideal for gigabit and 10G Copper Ethernet network applications. This patch panel is ideal for use with Cat6A shielded cabling, which is specifically designed to eliminate EMI and crosstalk, ensuring peak performance and data integrity.




Cat6A Performance

Cat6A cabling allows performance of up to 10Gbps speeds over Cat6A Ethernet cables.




Shielded Housing Design

Sturdy metal housing design protects against EMI/RFI noise for a more stable connection.



Cable Management

Integrated cable management cover plate with convenient cable separation for better organization and reduced cable clutter.

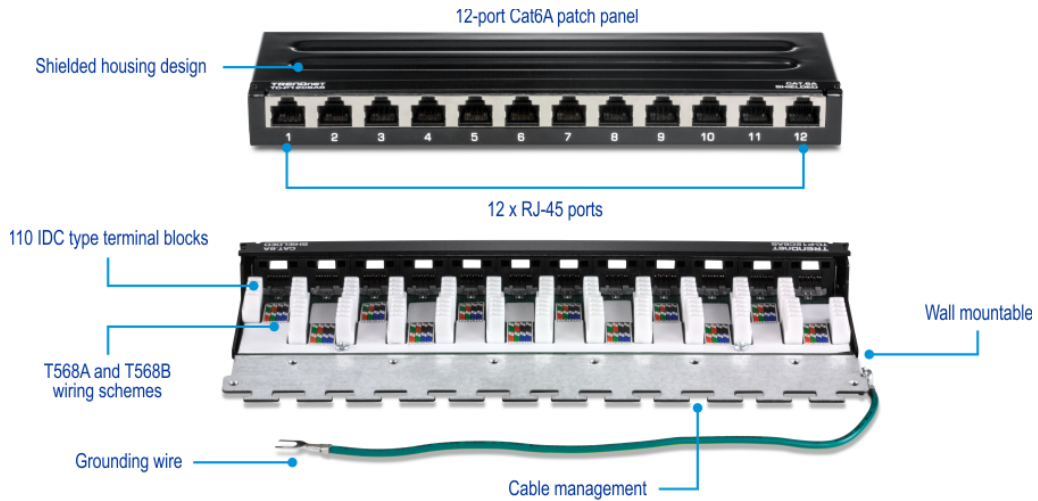

SPECIFICATIONS

Standards

- ANSI/TIA/EIA-568-B.2-1
- EN50173-1: 2002
- ISO/IEC 11801 2nd edition: 2002

Interface

- 12 x RJ-45 ports with 50 micron gold-plated 8P/8C contacts
- T568A/T568B wiring for Krone 110 termination with color-coded wiring diagram
- 90° IDC terminals
- Compatible with 22 – 26 AWG solid or stranded wire
- Integrated cable management
- SPCC steel construction
- 18 AWG grounding wire with screw terminal

Mounting Options

- Wall mountable

Electrical Specification

- Insulation resistance: $\geq 500 \text{ M}\Omega$
- Dielectric Withstand Voltage: 500V DC
- Contact resistance: $\leq 35 \text{ M}\Omega$
- Current rating: 1.5A at 20° C (68° F)

Mechanical Specification

- Contact force 99.2g (3.5 oz.)
- Plug retention force: 13.3kg (29 lb.)
- 110/ Krone IDC insertion force: min. 4.5kg (9.9 lb.)
- 110/ Krone IDC retention force: min. 0.5kg (1.1 lb.)

Operating Temperature

- -25° – 50° C (-13° – 122° F)

Operating Humidity

- Max. 90% non-condensing

Dimensions

- 0.5U design
- 220 x 97 x 25mm (8.66 x 3.8 x 0.98 in.)

Weight

- 506g (17.84 oz.)

Warranty

- 3 year

Certifications

- CE
- FCC

Package Contents

- TC-P12C6AS
- Quick Installation Guide
- Cable ties & screws