

Tech specs

FIBRA

Case C (260)

Casing for an Ajax module and a 7 Ah battery



Compatibility

LineSupply Fibra >

with a battery up to 7 Ah

Devices installation

Number of slots

1

To install a different number of devices, select a model with the appropriate number of slots:

- [Case A \(106\)](#);
- [Case B \(175\)](#);
- [Case D \(430\)](#).

Plastic rails

 Case

More 

Slide LineSupply Fibra along the rails to remove it from the casing.


Cable fasteners

to hold the cables together with ties

Plastic stoppers

to protect the installed device

During drilling, the instrument rests on the Case stoppers.

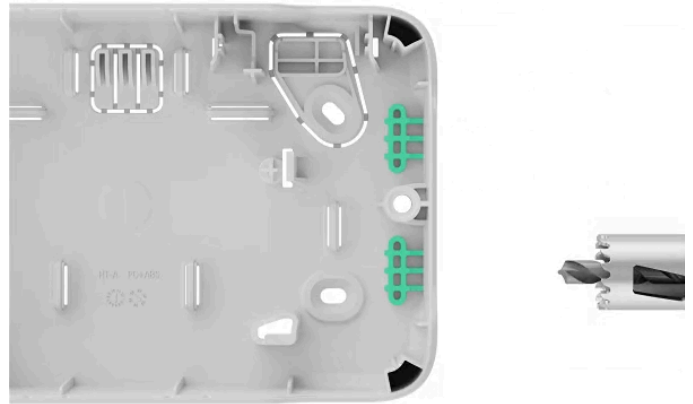


Bubble level

To check the inclination angle of the casing during installation.

Recesses for drilling

Ø20 mm or Ø32 mm

The drill bit is fixed in the recess and does not move during drilling. We recommend using a hole saw for plastic.

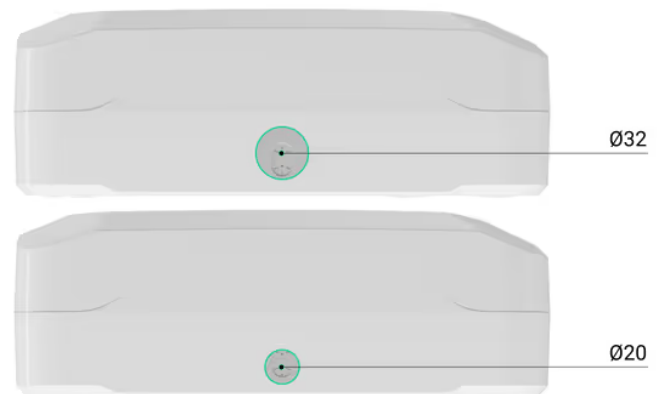

Wider holes

To ensure that the casing is installed correctly, even if there are errors during installation.

Holders for a battery

up to 7 Ah

To prevent accidental dislodgement of the battery.



Key features

Tamper board

Included in the Case complete set. The tamper board connects to the appropriate LineSupply Fibra connector and protects the installed device from sabotage.

What is tamper >

Holding screws

in the casing lid

Latches

to secure the lid during installation

The latches prevent the lid from falling off Case until it is secured with screws.

Recomendations

The device is designed for indoor use only. Case is produced in several versions.

Which Case to choose >

Product

Dimensions

260 × 195 × 93 mm

Weight of the black Case

997 g

Weight of the white Case

1,045 g



Operating temperature range

from -10 °C to +40 °C

Operating humidity

up to 75%



93 mm

Colours

Black



White



Complete set

Case C (260)

Tamper board

Installation kit

Quick start guide

Additional information

Compliance with standards

Learn more >

User manual

Learn more >

Warranty

24 months

Learn more >

Subscribe

Subscribe to our emails about secure life. No spam.

Subscribe

Request extra help

✉ support@ajax.systems

📍 @AjaxSystemsSupport_Bot



Rating 4.6

2,500,000

people worldwide under Ajax protection



Products

Superior

Fibra

Intrusion protection

Video surveillance

Fire detection

Water leak prevention

Comfort & Productivity

Solutions

Customer stories

Ajax ecosystem integrations

Ajax Ready products

Solutions by facility type

Why Ajax

How it works

Company

Blog

About us

Press page



Software

For users

PRO Desktop

Ajax Translator

Scenarios



Support

Manuals and articles

Compliance with standards

Tools

Battery life calculator

Radio communication range calculator

Fibra power supply calculator

Case configurator

Switches and outlets configurator

Ajax devices compatibility

All web tools

For partners

For partners

Ajax Academy

Partner Portal

[Events](#)

[Career](#)

[Reviews and feedback](#)

[🇷🇴 România](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#) [Anti-Spam Policy](#)

[End user agreement](#) [Warranty](#)

© 2024 AJAX SYSTEMS CH. All rights reserved